


Specifications

SunBriteTV Model DS-4720L

LCD Screen	47-inch diagonal Color Active Matrix TFT LED LCD
Resolution	1920 x 1080 full-HD 1080p
Aspect Ratio	16:9
Backlight Brightness - Surface Luminance, white	2000 nits (cd/m2)
Ambient Light sensor - auto dimming	Yes
Contrast Ratio	1300:1
Viewing Angle	178° x 178°
Response Time	10 milliseconds
TV formats	1080p, 1080i, 720p, 720i, 480p, 480i
Input Connectors:	
Tuner	Antenna/CATV (ATSC/QAM/NTSC) x1
HDMI	HDMI™ Input x 2
Video Composite	S-Video x1 and Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x2
PC	15-pin D-sub VGA plus Stereo Audio
Control Set	RS232 Serial, Discrete IR Control, Concealed rear IR Window
Audio Out	Digital: SPDIF x 1 (fixed), Analog: 1/8" headphone jack(variable)
Speakers	10-watt x 2 channels water-resistant detachable speaker module
Exterior	Powder-coated aluminum
Colors	Black and Silver
Input Power	100-240 VAC, 50-60 Hz 2.8 A Max (2.25a @ 120VAC)
Operating Temp.	-40° to 122° F. (-40° to 50° C.) *
Non-op. Temp. (Off-mode with power applied)	-40° to 140° F. (-40° to 60° C.) The non-operating temperature feature requires power to be applied
Accessories Included	Water-resistant remote control
TV Dimensions	44.75" W x 27.16" H (29.33" H with speakers) x 7.00"D
Weight	88.0 lbs. (92.0 lbs. with optional speakers)
Residential Warranty	Two or Three year, in-factory, parts and labor
Commercial Warranty	Two or Three year, in-factory, parts and labor
Mount Pattern	600mm x 200mm

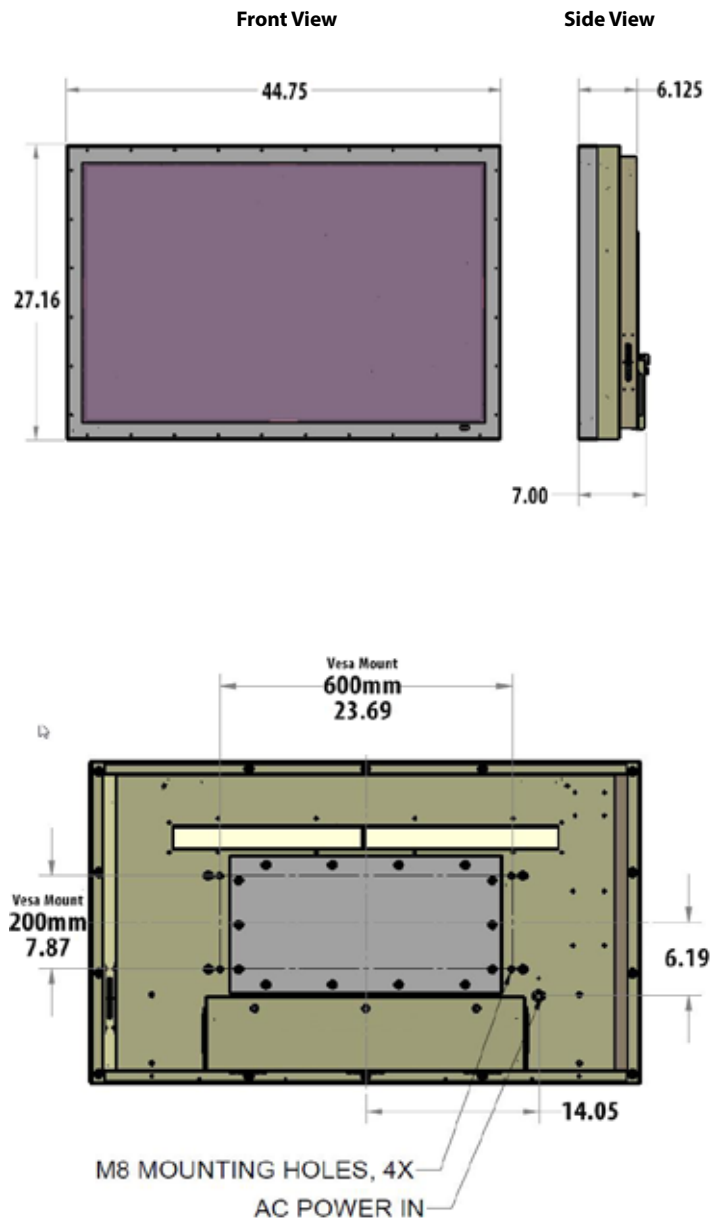

07.24.14

Specifications are subject to change.